


Schutzvermerk ISO 16016 beachten.

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

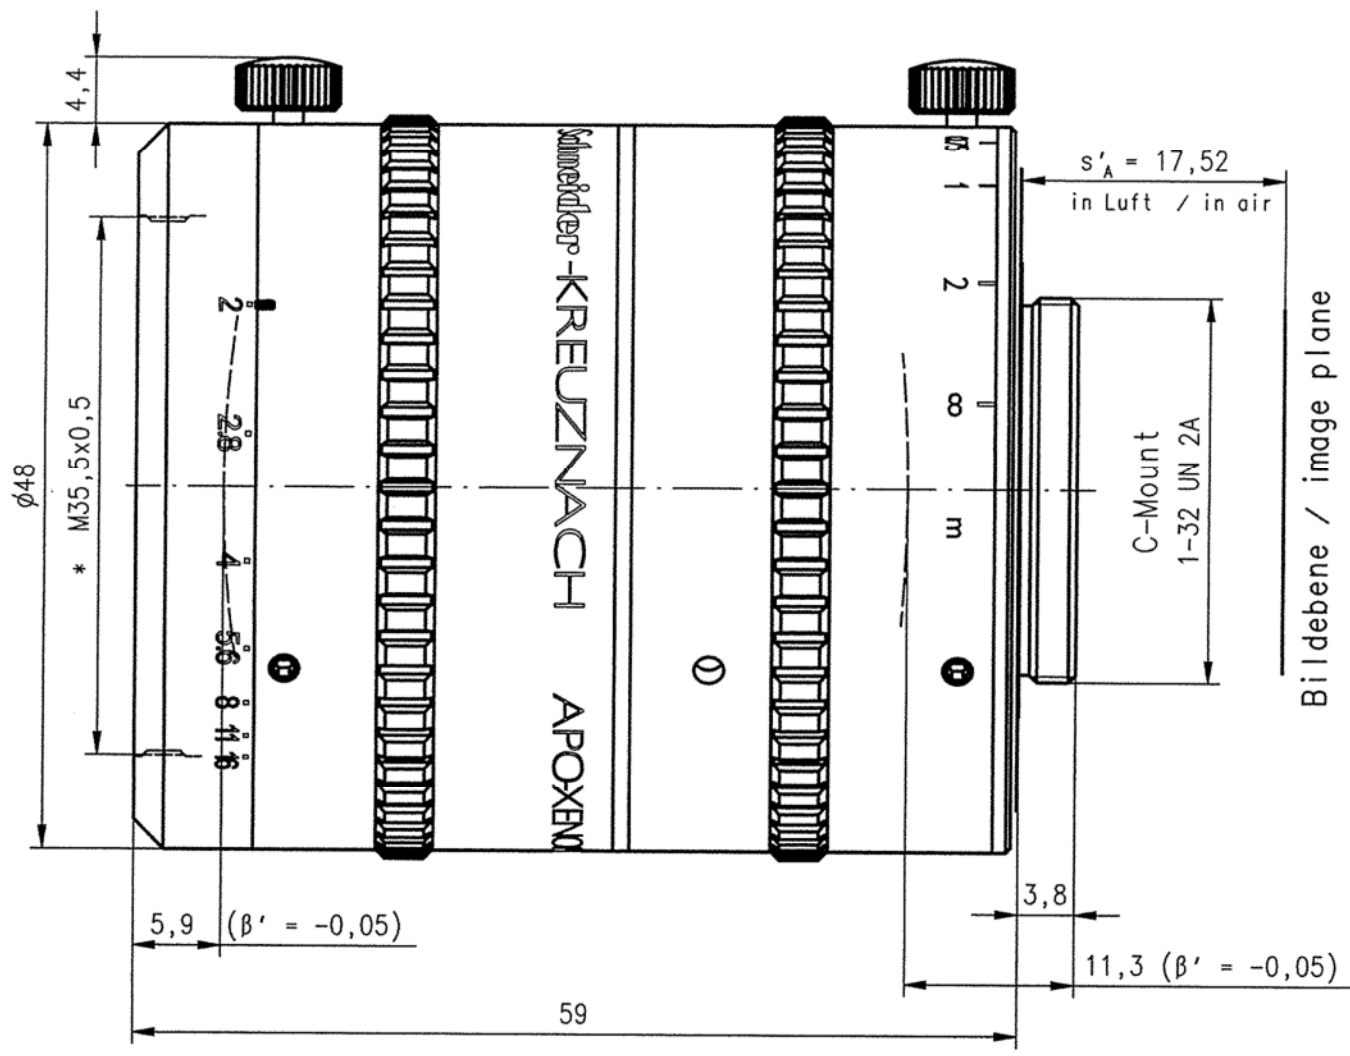

* Filtergewinde (filter thread)

Optische Grunddaten (optical Data)

f'	20,517	s'_{AP}	-36,013	Blendenbereich (iris range)	2-16
s'_F	24,177	β' Bereich (β' area)	0 - (-0,1)	Blendendurchmesser Nennwert (aperture diameter nominal)	14,2
$s'_{H'}$	3,66	β'_p ($\beta' = -0,05$)	2,9337		
HH'	23,176	$00'$ ($\beta' = -0,05$)	475,569	Sonstige Angaben (other information)	
$S_1 S_k$	45,58	s_1 ($\beta' = -0,05$)	-404,786	Schutzkappe vorn (front lens cap)	1009681
s_{EP}	12,541	s'_k ($\beta' = -0,05$)	25,203	Schutzkappe hinten (rear lens cap)	30339
Bildkreis (image circle)			24	Gewicht (weight)	450 g
Angaben ohne Einheiten in mm (all dimensions without unit in mm)				Bestell- Nr. (order-no.)	1056472

Datum (date) 10.10.11 Nur zur Information (only for information)

Freigabe (release)	
R & D	<input checked="" type="checkbox"/>
Production	<input checked="" type="checkbox"/>
Sales	<input checked="" type="checkbox"/>
VT	<input checked="" type="checkbox"/>

Apo-Xenoplan 2,0/20

Jos. Schneider Optische Werke GmbH
 Ringstr. 132 55543 Bad Kreuznach
 Germany

