Schutzvermerk ISO 16016 beachten.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

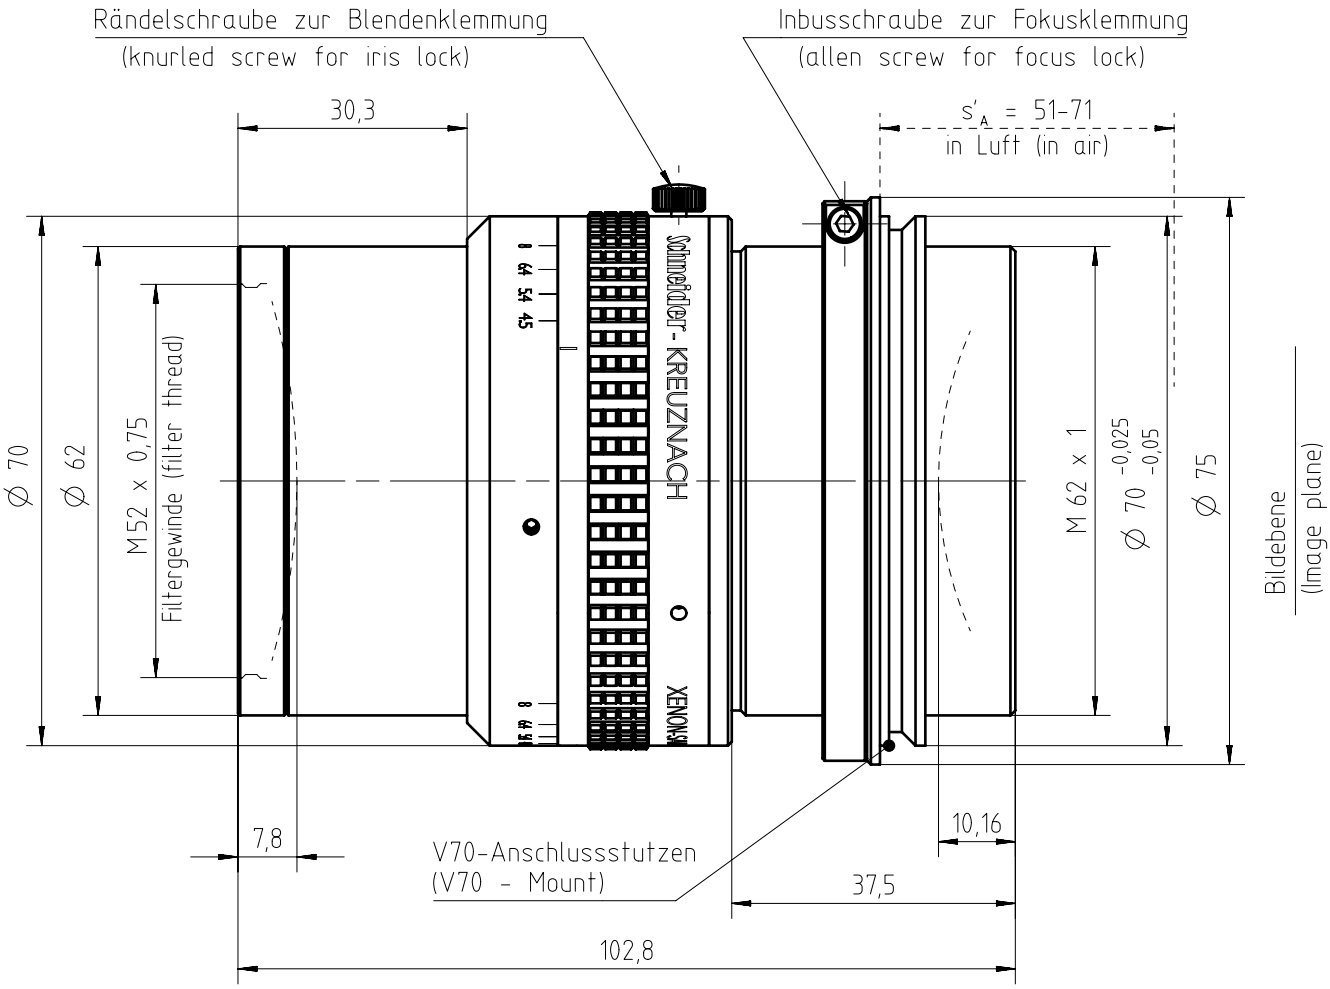


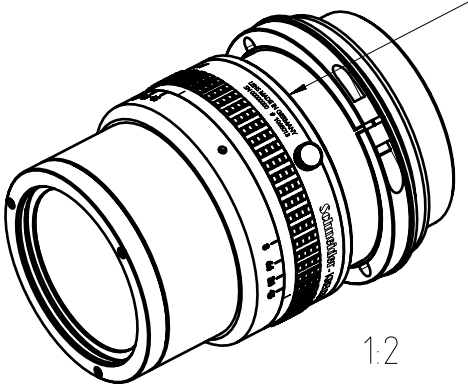

roter Punkt, Kennzeichnung
bester vermittelter Azimut,
90°versetzt zur Zeilenrichnung

red dot marking for best azimut
90° to line direction

1:2

**Optische Grunddaten (optical data)**

| | | | | | |
|---|---|---|---|---|---|
| f' | 95,00 | $s'_{AP}$ | -41,78 | Blendenbereich (iris range) | 4,5 - 8 |
| $s'_{F'}$ | 53,13 | β' Bereich (β' area) | -0,03/-0,17 | Blendendurchmesser Nennwert (aperture diameter nominal) | Ø 14,4 |
| $s'_{H'}$ | -41,87 | $\beta'_P$ (β'= -0,07) | 1.0 | | |
| HH' | -2,22 | OO' (β'= -0,07) | 1551,7 | **Sonstige Angaben (other information)** | |
| $S_1S_k$ | 84,84 | s (β'= -0,07) | 53,2 | Schutzkappe vorn (front lens cap) | 32454 |
| $s_{EP}$ | 45,28 | $s'_k$ (β'= -0,07) | 59,8 | Schutzkappe hinten (rear lens cap) | 32454 |
| Bildkreis (image circle) | | | 25,6 | Gewicht (weight) | 735 g |
| Angaben ohne Einheiten in mm (all dimensions without unit in mm) | | | | Bestell- Nr. (order-no.) | 1068013 |

| Datum (date) | 05.07.17 | Nur zur Information (only for information) |
|---|---|---|

| Freigabe (release) | |
|---|---|
| R & D | X |
| Production | X |
| Sales | X |
| VT | X |

# XENON SAPPHIRE 4,5/95-0001 / BETA'-0,07
## V70 - Mount

Jos. Schneider Optische Werke GmbH
Ringstr. 132 55543 Bad Kreuznach
Germany

Schneider KREUZNACH