

Linear Glass Polarizer AUF





Schneider Kreuznach polarizers are designed to fulfill industrial requirements. They are made of dichroic laminated polarizing polymers cemented between 2 slides of protective glass. Additionally we offer polarizing film for larger sizes or customized shapes and flexible solutions. Polarizing films consists of long chain polymers, which are aligned by a stretching process to produce the polarization effect. The polarizing film is covered on both sides with cellulose triacetate (TAC) for protection and is therefore mechanically stable.



Key features	Applications
<ul style="list-style-type: none">• Reduce reflections, increase contrast• High extinction ratio• Pre-cut custom shapes for polarizing films on request	<ul style="list-style-type: none">• 3D applications• Traffic surveillance/ITS• Food & beverage inspection• Mechanical stress test• LCD technology

Standard Products	
Name	Description
AUF	linear glass polarizer
AUF MRC	linear glass polarizer with AR coating
IFK P-W 64	linear polarizing film, contrast 40,000:1
IFK P-W 76	linear polarizing film, contrast 10,000:1

Linear Glass Polarizer AUF

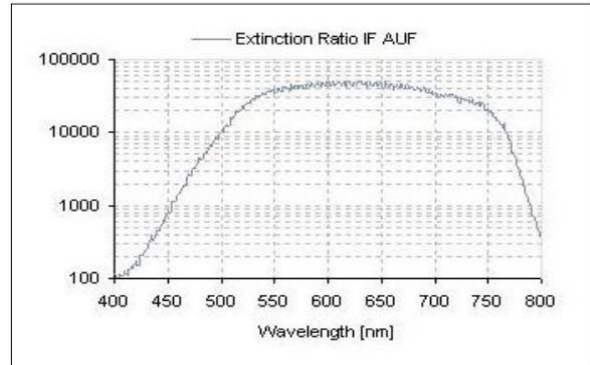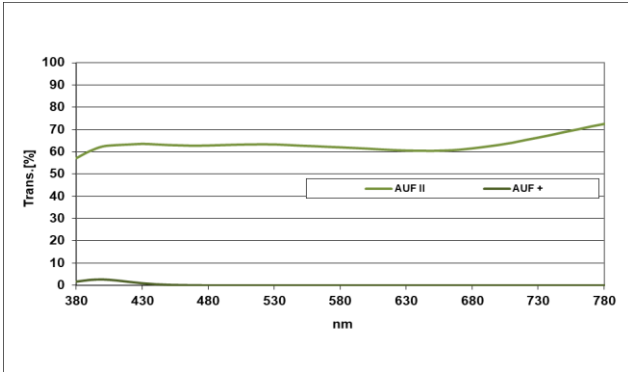

Technical specifications	according to ISO 10110
Wavelength range	420 nm - 750 nm
Transmittance	$(T_p + T_s)/2 \geq 34\%$
Wavefront distortion	19-30 mm: 13/1 (0.40) 31-50 mm: 13/1 (0.50) 50-64 mm: 13/1 (0.60)
Coating	uncoated
Temperature range	-20°C - +50°C
Glass thickness	2.7 +/- 0.25mm

Mounted Filter [IF] - rotatable and fixable			Mounted Filter [IF] - rotatable		
Mount	Thickness	ID	Diameter	Thickness	ID
SN2 25.5	2,7 mm	1010313	DH 25.5	2,7 mm	1006543
SN2 27.0	2,7 mm	1010314	DH 27.0	2,7 mm	1003225
SN2 30.5	2,7 mm	1011655	DH 30.5	2,7 mm	1006544
SN2 34.0	2,7 mm	1085592	DH 35.5	2,7 mm	1006980
SN2 35.5	2,7 mm	1054941	DH 37.0	2,7 mm	1006545
SN2 37.0	2,7 mm	1054942	DH 40.5	2,7 mm	1003336
SN2 40.5	2,7 mm	1019304	DH 43.0	2,7 mm	1008985
SN2 43.0	2,7 mm	1054943	DH 46.0	2,7 mm	1007691
SN2 46.0	2,7 mm	1054944	DH 49.0	2,7 mm	1003337
SN2 49.0	2,7 mm	1054945	DH 52.0	2,7 mm	1007671
			DH 55.0	2,7 mm	1080151
			DH 58.0	2,7 mm	1009114
			DH 62.0	2,7 mm	1078763
			DH 67.0	2,7 mm	1003338

Unmounted Filterglass [IFG]					
Mount	Thickness	ID	Mount	Thickness	ID
23.0 mm	2,7 mm	ID to be defined	33.0 mm	2,7 mm	1089781
24.0 mm	2,7 mm	ID to be defined	34.0 mm	2,7 mm	1086470
29.0 mm	2,7 mm	1089780			

Order Nomenclature	
Mounted Filter [IF]	Unmountd Filterglass [IFG]
IF AUF [Mount] [Thickness]	IFG AUF [Diameter] [Thickness]
Example: IF AUF SN2 25.5 2.7	Example: IFG AUF 23.0 2.7


SN2-Mount

The SN2-Mount is designed for polarizers and achieves highest possible aperture, avoiding vignetting in machine vision systems. Its unique locking mechanism fixes the correct orientation, even in typical industrial environment. The filters are glued into the mount to secure them against vibrations when integrated into robots or production lines. It is ideal to be used in automated fabrication. SN2-Mounts have a female and male M-thread, and can be stacked if several filters must be combined.

Key features	Applications
--------------	--------------

- | | |
|---|---|
| <ul style="list-style-type: none"> • Rotatable • Large clear aperture • No vignetting • Stackable • Robust • Black anodized brass | <ul style="list-style-type: none"> • Mounted on lenses • Mounted on measurement instruments |
|---|---|

Thread	Diameter	Clear Aperture	Thickness
M 25.5x0.5	27 mm	22.7 mm	7.4 mm
M 27.0x0.5	28.5 mm	23.7 mm	7.4 mm
M 30.5x0.5	32 mm	26.7 mm	7.4 mm
M 35.5 x0.5	37 mm	31.7 mm	7.4 mm
M 37.0x0.75	38.5 mm	32.7 mm	7.4 mm
M 40.5x0.5	42 mm	36.7 mm	7.4 mm
M 43.0x0.75	44.5 mm	37.7 mm	7.4 mm
M 46.0x0.75	47.5 mm	41.7 mm	7.4 mm
M 49.0x0.75	50.5 mm	44.7 mm	7.4 mm

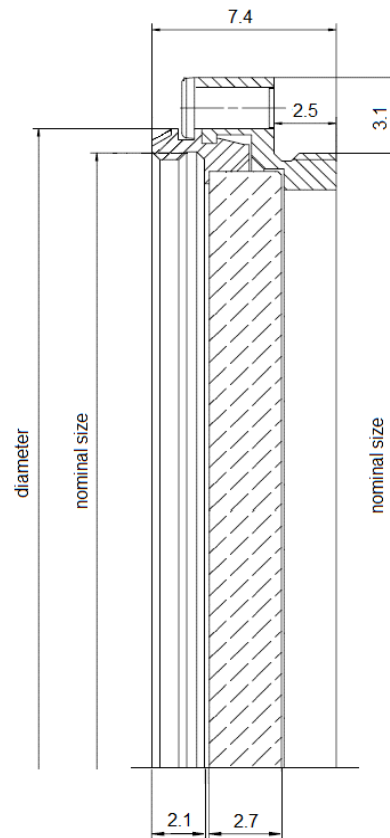


DH-Mount

Schneider-Kreuznach offers a variety of mounts for polarizers with common thread sizes to fit on most camera lens systems. The DH-Mount is rotatable to adjust polarization axis in the required orientation. The filter glass is held by a retainer ring. All DH-Mounts have a female and male M-thread and can be stacked if several filters must be combined.

Key features	Applications
<ul style="list-style-type: none"> • Rotatable • Stackable • Black anodized brass 	<ul style="list-style-type: none"> • Mounted on lenses • Mounted on measurement instruments

Thread	Diameter	Clear Aperture	Thickness
M 25.5x0.5	27 mm	20.8 mm	9.2 mm
M 27.0x0.5	28.5 mm	21.8 mm	9.2 mm
M 30.5x0.5	32 mm	25.8 mm	9.2 mm
M 35.5 x0.5	37 mm	30.8 mm	9.2 mm
M 37.0x0.75	38.5 mm	31.8 mm	9.2 mm
M 40.5x0.5	42 mm	35.8 mm	9.2 mm
M 43.0x0.75	44.5 mm	37.8 mm	9.2 mm
M 46.0x0.75	47.5 mm	40.8 mm	9.2 mm
M 49.0x0.75	50.5 mm	43.8 mm	9.2 mm
M 52.0x0.75	53.5 mm	46.8 mm	9.2 mm
M 55.0x0.75	56.5 mm	49.8 mm	9.2 mm
M 58.0x0.75	59.5 mm	52.8 mm	9.2 mm
M 62.0x0.75	63.5 mm	56.8 mm	9.2 mm
M 67.0x0.75	68.5 mm	61.8 mm	9.2 mm

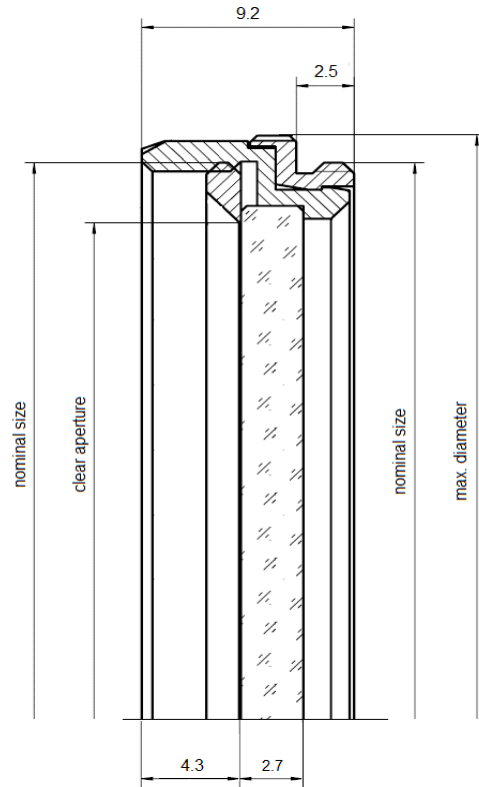

Headquarters Europe

Jos. Schneider Optische Werke GmbH
Ringstraße 132
55543 Bad Kreuznach
+49 671 601 205
isales@schneiderkreuznach.com
www.schneiderkreuznach.com

Offices Worldwide

America

+1 800 645 7239 (East Coast)
+1 800 228 1254 (West Coast)
info@schneideroptics.com

Asia

+86 755 8832 1170
info@schneider-asiapacific.com